

SyncServer S600/S650 Series Timing Architecture



In the world of up-to-date, high-accuracy time servers, the fundamental technique to keep a time server extremely accurate has changed from traditional varactor-steering of a physical oscillator to deploying superior multifactor software-based algorithms coupled with a free-running oscillator and frequency synthesizer. The SyncServer S600 series implements this proven timing architecture for world-class time and frequency performance. Understanding the basics of how the SyncServer operates helps to answer many questions about how it behaves in different scenarios.

The Role of Internal Oscillator

At the core of time and frequency synchronization technology is the capability to accurately transfer time and/or frequency from a reference time source to the local timing outputs, like the outputs from a SyncServer time server. Central to the time server is the local oscillator, which provides a stable internal frequency reference that effectively provides a buffer between an external reference input and local output. Accurately frequency-aligning the internal oscillator to a reference source is traditionally referred to as “oscillator disciplining”. This term derives from the common practice of directly steering the oscillator to match the selected input reference frequency. Because many types of oscillators inherently have significant frequency error and drift (as they are not perfect resonators), the disciplining process is the technique to carefully “steer” the local oscillator frequency to keep it as on-frequency as possible relative to the reference.


GPS/GNSS as the Reference Time Source

The most common time reference used to discipline a local oscillator in a stratum 1 server is the GPS satellite system, as well as other GNSS constellations. Each GPS satellite has an atomic clock on board whose accuracy is traceable to the many atomic clocks located at the U.S. Naval Observatory (USNO). The GPS satellite system offers broad signal coverage over the planet, from which a SyncServer locks to the available broadcast signals, providing a reliable and accurate time source from which to precisely synchronize the time and frequency. Within the SyncServer, GPS satellite data is converted to a 1PPS signal that provides the on-time mark used to derive that precise time and frequency.

Historical Varactor-Steering

A traditional way to steer an oscillator involves creating a closed-loop feedback system where the frequency output of the local oscillator is measured against the output of the GPS receiver. The local oscillator is actively varactor-steered to adjust its output frequency to closely follow the GPS 1PPS frequency (there is filtering involved). This technique is called varactor-steering and while it has its place and tradeoffs and has been used for many years, the technology deployed in the SyncServer substantially improves upon the varactor-steering technique.

Figure 1. Traditional GPS-referenced clocks use varactor-steering to discipline the local oscillator.

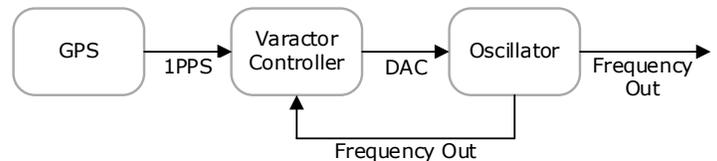

Avoiding the Downsides of Varactor-Steering

The SyncServer S600 series uses a modified approach to system frequency-steering that avoids active varactor-steering adjustment of the internal frequency reference. Figure 2 shows the simplified architecture compared with the direct oscillator steering method shown in Figure 1. The internal oscillator is allowed to free run (no active adjustment) and becomes an input to a high-resolution frequency synthesizer. With this approach, frequency adjustments are applied directly to registers in the synthesizer, resulting in an “on-frequency” output from the synthesizer. This output is then used to drive the frequency of all outputs in the SyncServer. The benefits of this approach compared with traditional varactor-steering are numerous:

- The synthesizer provides a linear frequency control (a given step-size change of rate-control results in a predictable frequency change). In contrast, direct varactor-based oscillator steering can have significant non-linearity in steering, leading to variable and non-optimized output behavior (depending on the portion of the steering curve being used).
- Because this control system exhibits improved linearity, it allows signal-processing algorithms to be more effective, unencumbered by the deleterious effects associated with unaccounted for non-linearity.

SyncServer S600/S650 Series Timing Architecture


- The on-frequency output from the core is decoupled from the internal reference oscillator frequency, which allows for driving the internal system with a much higher initial on-frequency signal.
- The synthesizer provides high-resolution frequency control that is the same regardless of the selected reference oscillator. This is compared to direct oscillator steering where the rate control sensitivity will likely vary between different internal oscillators that can be installed in the unit (for example, standard quartz, OCXO, Rubidium).

For these reasons, the incorporation of a free-running internal oscillator followed by synthesizer provides an improved overall approach for the S600 SyncServer series core clock architecture.

Superior Softlock Technology

The synthesizer-based rate control is combined with an embedded software library (known at Microsemi as Softclock) that takes full advantage of the overall system linearity and awareness of the stability characteristics of the specific internal reference oscillator to optimize system time and frequency. The Softclock software simultaneously observes all provided time and frequency references to ensure that smooth transitions between references will occur when needed.

Figure 2. The patented Microsemi Softclock controller with frequency synthesizer improves overall time and frequency accuracy and stability.

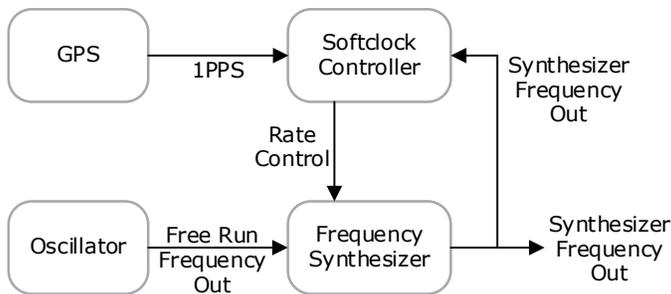

Softclock Learns and Adapts to Multiple Inputs and Environmental Conditions

The benefit of the Softclock system is a more accurate and stable time server relative to UTC(USNO) through GPS/GNSS or whatever time reference is provided. The Softclock leverages multivariate algorithms to attain a form of artificial intelligence for synchronization. The system can monitor and adapt to multiple simultaneous inputs in addition to GPS, such as IRIG in, PTP in, NTP peering, 10 MHz in, and 1PPS in. Additionally, internal temperature is monitored and (in some cases) servo-controlled as a method to reduce potential temperature-associated timing errors. This includes anticipating frequency shifts in the free running local oscillator as a function of observed temperature change and air flow inside the SyncServer chassis.

Through manufacturing calibration, the SyncServer achieves a specification of 15 ns RMS UTC(USNO).

The primary function of the SyncServer is to output accurate timing signals through the Ethernet ports or BNC connections. To accomplish this, the output of the frequency synthesizer serves as the rate reference basis for all SyncServer outputs ranging from the 1PPS to the IRIG signals, sine waves, programmable rates, NTP and PTP timestamping operations, and so on. All of these signals are connected to the common core that is initiated from the synthesizer output.

Demonstrated, Industry-Proven Softlock Performance

While the Softclock technology is new to SyncServers, the technology itself is patented and has been refined for over 10 years in Microsemi telecommunication synchronization systems widely deployed around the world. The result is a robust and stable solution that is not only used in Microsemi products, but also licensed to manufacturers that need precise timing in their products. The chances are high that the mobile backhaul of voice and data for your cellular phone is being synchronized by Microsemi Softclock systems.

Oscillator Choice Matters

As good as the SyncServer timing architecture coupled with Softclock technology is, the choice of which oscillator is installed in the SyncServer is important as well. In general, the less expensive the oscillator, the less stable it is. When locked to a reference, the stability of the internal oscillator impacts two important areas:

- A less stable oscillator requires more frequent synthesizer adjustments in order to bound the negative impact of oscillator drift. This results in higher variance on timing outputs when a less stable oscillator is used, even with a highly stable input reference such as GPS.
- When potentially less stable input references are provided—such as PTP passing through multiple network hops—the ability to recover good synchronization can depend on the maximum time over which the input can be observed without oscillator instability becoming a factor. With more stable oscillators, the ability to observe for much longer before making control decisions can significantly improve the output timing performance.

When connection to input references is lost, the SyncServer depends on the Softclock historical modeling and calibration of the installed oscillator to maintain time and frequency performance. This condition is referred to as “holdover”, and the performance achieved is strongly dependent on the selected oscillator stability. The SyncServer 600 series holdover performance by oscillator type is very good, as reflected in the commonly-cited industry comparison accuracy after 24 hours. This information is listed in the following table.

SyncServer S600/S650 Series Timing Architecture

Oscillator	Holdover Drift (1 st 24 hours)
Standard	400 microseconds
OCXO	25 microseconds
Rubidium	<1 microsecond
External Cesium*	<100 nanoseconds

Holdover drift is the anticipated accuracy of the SyncServer over a period of time if disconnected from all external time references.

*Cesium Standard with $\sim 1 \times 10^{-12}$ frequency stability.

Excellent Output Signal Coherency for Rates, Time-codes, and Standard Sine Waves

SyncServers are deployed in a variety of applications where timing output signal alignment to each other and to UTC becomes particularly critical. SyncServer Timing I/O modules that output time codes and rates are coherent with each output on the module, as well as with alignment to other modules and UTC when tracking GPS/GNSS. This includes sinewaves generated from the Timing I/O modules. Also, programmable pulse outputs set to periods that do not repeat every second will still maintain coherency with other similar outputs because they all begin together and remain aligned thereafter.

Low Phase Noise and Coherency Tradeoffs

Low phase noise (LPN) applications are a situation where direct oscillator steering may be needed. This is because one of the only practical ways to accomplish close-in phase-noise specifications is directly from a quartz oscillator output that exhibits the needed close-in characteristics (which is a specially made oscillator for this purpose). The technique is then to position the oscillator as close to the output connections as possible, minimizing any signal degradation due to excessive signal conditioning in the path.

Despite the outstanding LPN properties of these special quartz oscillators, they are still not inherently accurate and will drift. The solution in SyncServer 600 series is to use the synthesizer-based steering method (described earlier) as the “on frequency” signal that then controls the LPN oscillator in order to also keep it on frequency. Care is taken to minimize the rate of steering of the LPN oscillator because adjusting it too fast can degrade the phase-noise performance. The relationship is “loosely-coupled.” When using an LPN module in a SyncServer, the main reference oscillator should be Microsemi Rubidium Miniature Atomic Clock (MAC) because its inherent longer-term stability leads to less frequent adjustments at the LPN oscillator input.

This provides excellent long-term stability of the 10 MHz signal as well as the exceptionally good LPN characteristics. However, it does not provide the exact coherency with the 1PPS output that some applications may require. Satellite ground stations will find the SyncServer LPN signals exceptionally good, whereas some geographically distributed radar applications that require the coherency between the 10 MHz and the UTC-aligned 1PPS to be near perfect might find the SyncServer does not meet their specific design criteria. There is only one way to be certain and that is to test the SyncServer in the intended application and see if it meets the performance requirements.

Softclock Time and Frequency Technology is the Future

The Microsemi timing experts have learned that with the inexpensive computational power and time and frequency hardware available today, a superior timing system no longer relies on the physics of vibrating quartz crystals or atomic oscillators alone to keep a time server extremely accurate. Software modeling and compensating for non-linearities in oscillator behavior, monitoring changing environmental conditions, and better overall electronic design and packaging delivers the outstanding time and frequency performance found in an advanced time server like the Microsemi SyncServer S600/S650 series.



Microsemi Headquarters

One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Sales: +1 (949) 380-6136
 Fax: +1 (949) 215-4996
 email: sales.support@microsemi.com
 www.microsemi.com

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.